


NEBCO™ STYLE 6902

New England
BRAIDING
COMPANY INCORPORATED Since
1979

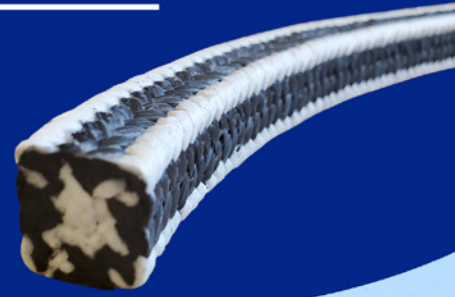

Description

NEBCO™ Style 6902 Seal Rope is manufactured from a low friction PTFE/graphite composite fiber with extrusion resisting corners of expanded PTFE tightly braided about centrally placed non-stretching cores of expanded PTFE packing yarn used axially.

Style 6902 Seal Rope is available in 3/4" and 1" cross sections and in metric cross sections of 20 mm and 25mm. Other sizes are available by special order.



Specifications

- pH range: 0-14.
- Surface speeds to: 1,200 FPM (6 m/s).
- Pressure to: 1,000 PSI (68.9 bar).
- Temperatures to: 500°F (260°C).

Applications & Services

For specific applications such as Rama Repola washers, where a dense construction with low elongation is required. The diamond shaped cross section readily conforms to the mating vee shaped stationary and rotating sides used in these machines. Style 6902 is useful in all types of brown stock and bleach washers.

Contact Us

To Learn More About Our Unique Products

Telephone: 603-669-1987

Email: nebco@anti-keystone.com

Web: www.anti-keystone.com

Physical Address:

610 Gold Street, Manchester, NH 03103

